


TÜV NORD CERT GmbH
herewith declares that

Perlight Solar Co., Ltd.
OUFENG ROAD, MUYU ADMINISTRATION AREA, ZEGUO TOWN
WENLING CITY, ZHEJIANG PROVINCE, 317521
P.R. CHINA

is authorized to provide the product mentioned below with the mark as illustrated:

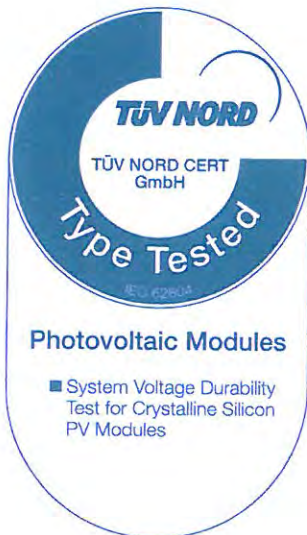

Description of product (details see Annex 2):

PV Modules with 6" Mono-crystalline Silicon Solar Cells

PV Modules with 5" Mono-crystalline Silicon Solar Cells

PV Modules with 6" Poly-crystalline Silicon Solar Cells

Tested according to: IEC 62804 Ed. 1.0 Draft (82/685/NP)
Remark: 60°C, 85% RH, 96h
Registered No.: 44 780 16 406749 - 121
Manufacturer: see Annex 1
Test Report No.: 492010514.002
File No.: SHV04010/16-04

Valid until: 2019-09-09



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Essen, 2016-07-04

Please also pay attention to the information stated overleaf.

Anlage 1 zum Zertifikat Nr.: / Annex 1 to Certificate No.: 44 780 16 406749 - 121

Seite / Page 1 von / of 1

Aktenzeichen: / File reference: SHV04010/16-04

2016-07-04

Manufacturer:

Manufacturer:

Perlight Solar Co., Ltd.

OUFENG ROAD, MUYU ADMINISTRATION AREA, ZEGUO TOWN
WENLING CITY, ZHEJIANG PROVINCE, 317521, P.R. CHINA

Factory inspection report no.:

862010190.003

Remark:

Factory inspection is mandatory to be performed annually. Please refer to factory inspection report for detailed information.

A handwritten signature in blue ink, appearing to read "Rogner K.", is written over the printed name of the certification body.

TÜV NORD CERT GmbH
Certification Body
Consumer Products

Description of product(s):

Module types:

PV Modules with 6" Mono-crystalline Silicon Solar Cells:

72 cells: PLM-***M-72 (***) = 245-360, in increment of 5)

72 cells: PLM-***MA-72 (***) = 245-360, in increment of 5)

72 cells: PLM-***MB-72 (***) = 245-360, in increment of 5)

72 cells: PLM-***M-72F (***) = 245-360, in increment of 5)

72 cells: PLM-***MA-72F (***) = 245-360, in increment of 5)

72 cells: PLM-***MB-72F (***) = 245-360, in increment of 5)

66 cells: PLM-***M-66 (***) = 215-330, in increment of 5)

66 cells: PLM-***MA-66 (***) = 215-330, in increment of 5)

66 cells: PLM-***MB-66 (***) = 215-330, in increment of 5)

66 cells: PLM-***M-66F (***) = 215-330, in increment of 5)

66 cells: PLM-***MA-66F (***) = 215-330, in increment of 5)

66 cells: PLM-***MB-66F (***) = 215-330, in increment of 5)

60 cells: PLM-***M-60 (***) = 220-300, in increment of 5)

60 cells: PLM-***MA-60 (***) = 220-300, in increment of 5)

60 cells: PLM-***MB-60 (***) = 220-300, in increment of 5)

60 cells: PLM-***M-60F (***) = 220-300, in increment of 5)

60 cells: PLM-***MA-60F (***) = 220-300, in increment of 5)

60 cells: PLM-***MB-60F (***) = 220-300, in increment of 5)

"A" means with black backsheet, black frame, black silica gel and black tape stick on internal wiring.

"B" means with black backsheet, black frame and black silica gel

Types with suffix "F" means passed fire test.

Maximum system voltage:

1000V

Fuse rating:

15A

Application class:

Class A

Electrical protection class:

Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types:

PV Modules with 5" Mono-crystalline Silicon Solar Cells:

96 cells: PLM-***M-96 (***= 230-280, in increment of 5)

96 cells: PLM-***MA-96 (***= 230-280, in increment of 5)

96 cells: PLM-***MB-96 (***= 230-280, in increment of 5)

96 cells: PLM-***M-96F (***= 230-280, in increment of 5)

96 cells: PLM-***MA-96F (***= 230-280, in increment of 5)

96 cells: PLM-***MB-96F (***= 230-280, in increment of 5)

"A" means with black backsheet, black frame, black silica gel and black tape stick on internal wiring.

"B" means with black backsheet, black frame and black silica gel

Types with suffix "F" means passed fire test.

Maximum system voltage:

1000V

Fuse rating:

15A

Application class:

Class A

Electrical protection class:

Class II



TÜV NORD CERT GmbH
Certification Body
Consumer Products

Module types:

PV Modules with 6" Poly-crystalline Silicon Solar Cells:

72 cells: PLM-***P-72 (***) = 235-350, in increment of 5)

72 cells: PLM-***PA-72 (***) = 235-350, in increment of 5)

72 cells: PLM-***PB-72 (***) = 235-350, in increment of 5)

72 cells: PLM-***P-72F (***) = 235-350, in increment of 5)

72 cells: PLM-***PA-72F (***) = 235-350, in increment of 5)

72 cells: PLM-***PB-72F (***) = 235-350, in increment of 5)

66 cells: PLM-***P-72 (***) = 225-320, in increment of 5)

66 cells: PLM-***PA-72 (***) = 225-320, in increment of 5)

66 cells: PLM-***PB-72 (***) = 225-320, in increment of 5)

66 cells: PLM-***P-72F (***) = 225-320, in increment of 5)

66 cells: PLM-***PA-72F (***) = 225-320, in increment of 5)

66 cells: PLM-***PB-72F (***) = 225-320, in increment of 5)

60 cells: PLM-***P-60 (***) = 195-295, in increment of 5)

60 cells: PLM-***PA-60 (***) = 195-295, in increment of 5)

60 cells: PLM-***PB-60 (***) = 195-295, in increment of 5)

60 cells: PLM-***P-60F (***) = 195-295, in increment of 5)

60 cells: PLM-***PA-60F (***) = 195-295, in increment of 5)

60 cells: PLM-***PB-60F (***) = 195-295, in increment of 5)

"A" means with black backsheet, black frame, black silica gel and black tape stick on internal wiring.

"B" means with black backsheet, black frame and black silica gel

Types with suffix "F" means passed fire test.

Maximum system voltage:

1000V

Fuse rating:

15A

Application class:

Class A

Electrical protection class:

Class II

Remark:

For detailed product information, please refer to CDF (Constructional Data Form) in Annex 1 of test report.



TÜV NORD CERT GmbH
Certification Body
Consumer Products